




## AC BRUSHLESS FAN

AF6A14050B 140\*140\*50MM


Motor: AC Brushless  
 Bearing: Ball  
 Shell frame: Aluminium Alloy  
 Fan blade: Aluminium Alloy  
 Insulation: Class B  
 Wire: AWG#26UL1007 (optional)  
 PIN1: BLACK WIRE--- (-)  
 PIN2: RED WIRE--- (+)



**DIMENSIONS DRAWING(unit:mm)**

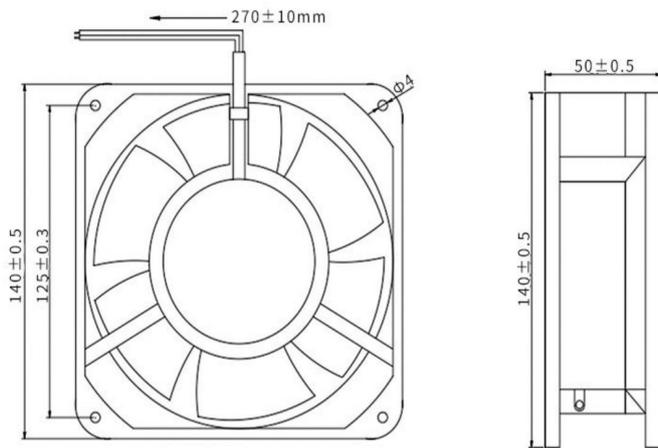

**P@Q CURVE(AT RATED VOLTAGE)**

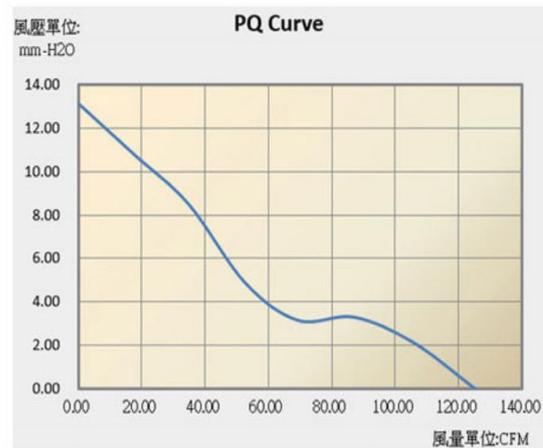

Model	Bearing Mode①	Rated Vol	Operati ng voltage	Rate d curr	Rated input power	Speed	Maximum air Flow		Maximum Air pressure		Noise	
		VAC	VAC	Amp	Watt		M3/min	CFM	mmH2O	InH2O		
PART. NO.						R. P. M						
AF6A14050B220M	B=Ball S=Sleeve H=Hydraulic	220	200~240	0.2	30	2800	1.058	125.39	13.14	4.538	45.6	
AF6A14050B220L		220	200~240	0.18	28	3200	1.358	140.58	14.53	5.638	50.8	


①Bearing Mode:Ball/ Sleeve/Hydraulic/Ball (UL)/Sleeve (UL)Hydraulic (UL)

②X=Function: FG RD RDL LD PWM TP VC RC CS RP SS AS CL IPX5

③A=Plug

④C=Customized by customers: Air volume, Air duct, Movement, Service life, Temperature, Noise, Material, Mold.etc.

导引：编码规则Code Rule

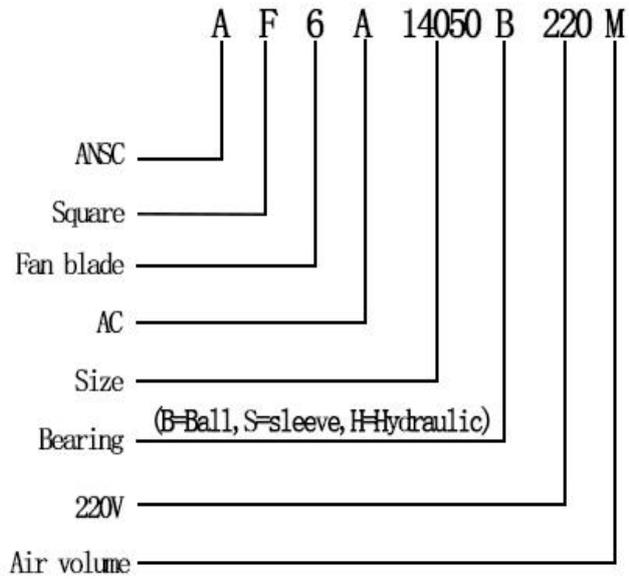

\*PROPRIETARY AND CONFIDENTIAL , THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF <ALL NEW SEMI>.  
ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF <ALL NEW SEMI> IS PROHIBITED.

<https://allnewsemi.com>  
<https://allnewsemi.shop>