




AC BRUSHLESS FAN

AQ5A17251B 172*150*51mm


Motor: AC Brushless
 Bearing: Ball
 Shell frame: Aluminium Alloy
 Fan blade: PBT UL94V-0
 Insulation: Class B
 Wire: AWG#26UL1007 (optional)
 PIN1: BLACK WIRE---(-)
 PIN2: RED WIRE---(+)



DIMENSIONS DRAWING(unit:mm)

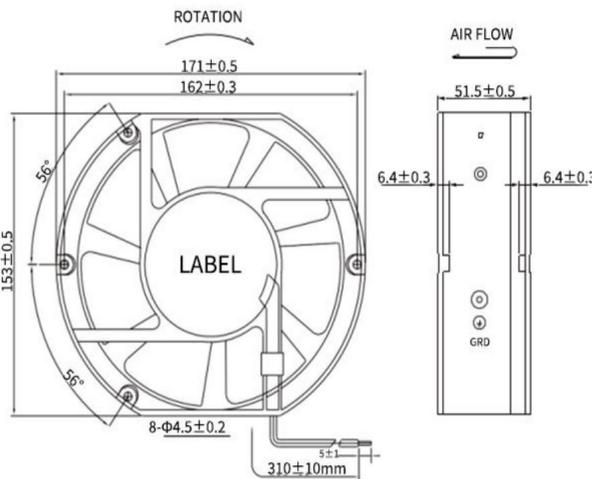

P@Q CURVE(AT RATEDVOLTAGE)

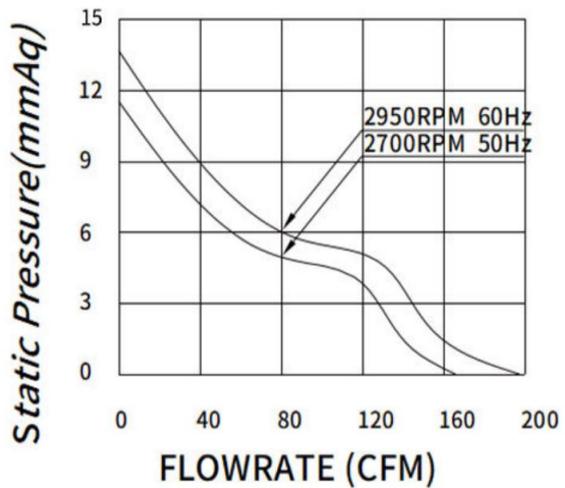

Model	Bearing Mode①	Rated Vol	Operat ing voltag	Rate d curr	Rated input power	Speed	Maximum air Flow		Maximum Air pressure		Noise
		VAC	VAC	Amp	Watt		M3/min	CFM	mmH2O	InH2O	
PART. NO.						R. P. M					
AQ5A17251B110L	B=Ball S=Sleeve H=Hydraulic	110	110~125	0.4	26/28	2700/2950	4.7/5.6	166/198	11.3/13.8	0.44/0.5	52/62
AQ5A17251B220L		220	220~240	0.2	26/28	2700/2950	4.7/5.6	166/198	11.3/13.8	0.44/0.5	52/62


①Bearing Mode:Ball/ Sleeve/Hydraulic/Ball (UL)/Sleeve (UL)Hydraulic (UL)

②X=Function: FG RD RDL LD PWM TP VC RC CS RP SS AS CL IPX5

③A=Plug

④C=Customized by customers: Air volume, Air duct, Movement,Service life, Temperature, Noise, Material, Mold.etc.

导引：编码规则Code Rule

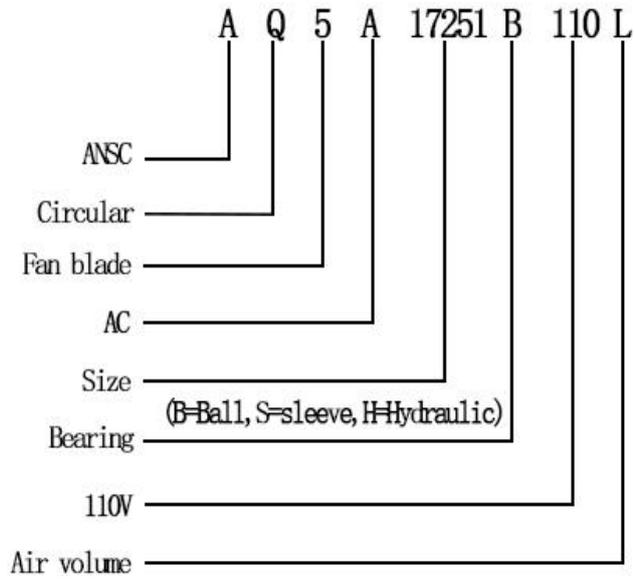

*PROPRIETARY AND CONFIDENTIAL , THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF <ALL NEW SEMI>.
ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF <ALL NEW SEMI> IS PROHIBITED.

<https://allnewsemi.com>
<https://allnewsemi.shop>