




AC BRUSHLESS FAN

AF5A12038B 120*120*38mm


Motor: AC Brushless
 Bearing: Ball
 Shell frame: Aluminium Alloy
 Fan blade: Gum leaf
 Insulation: Class B
 Wire: AWG#26UL1007 (optional)
 PIN1: BLACK WIRE----(-)
 PIN2: RED WIRE----(+)



DIMENSIONS DRAWING(unit:mm)

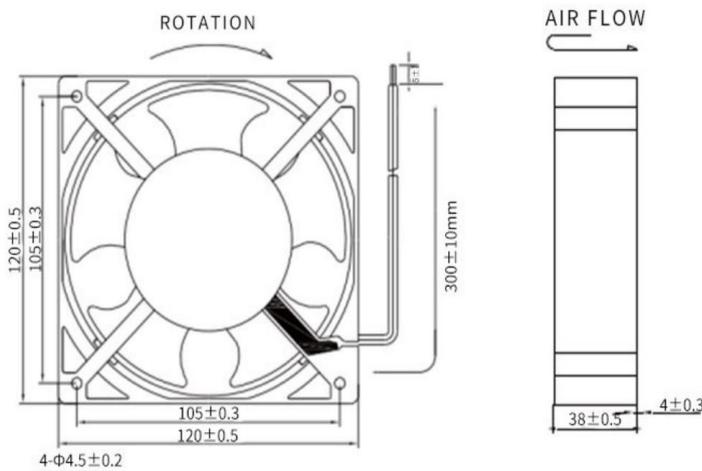

P@Q CURVE(AT RATED VOLTAGE)

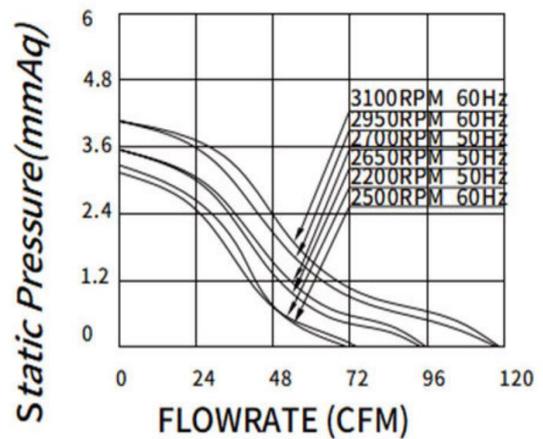

Model	Bearing Mode①	Rated Vol	Operating voltage	Rated current	Rated input power	Speed	Maximum air Flow		Maximum Air pressure		Noise
							M3/min	CFM	mmH2O	InH2O	
PART. NO.		VAC	VAC	Amp	Watt	R. P. M					dB-A
AF5A12038B110L	B=Ball S=Sleeve H=Hydraulic	110	100~125	0.14/0.1	12/10.5	2000/1800	1.86/1.6	66/60	2.78/2.68	0.1/0.1	30/29
AF5A12038B110H		110	100~125	0.22/0.1	20/19	2650/2950	2.57/3.2	91/113	3.56/4.06	0.14/0.1	40/45
AF5A12038B110M		110	100~125	0.17/0.1	16/14	2500/2200	2.12/1.9	75/70	3.0/3.2	0.11/0.1	37/35
AF5A12038B220L		220	220~240	0.08/0.07	12/10.5	2000/1800	1.86/1.6	66/60	2.78/2.68	0.1/0.1	30/29
AF5A12038B220H		220	220~240	0.12/11	20/19	2650/2950	2.57/3.2	91/113	3.56/4.06	0.14/0.1	40/45
AF5A12038B220M		220	220~240	0.09/0.08	16/14	2500/2200	2.12/1.9	75/70	3.0/3.2	0.11/0.1	37/35


① Bearing Mode: Ball/ Sleeve/ Hydraulic/ Ball (UL) / Sleeve (UL) Hydraulic (UL)

② X=Function: FG RD RDL LD PWM TP VC RC CS RP SS AS CL IPX5

③ A=Plug

④ C=Customized by customers: Air volume, Air duct, Movement, Service life, Temperature, Noise, Material, Mold. etc.

导引: 编码规则 Code Rule

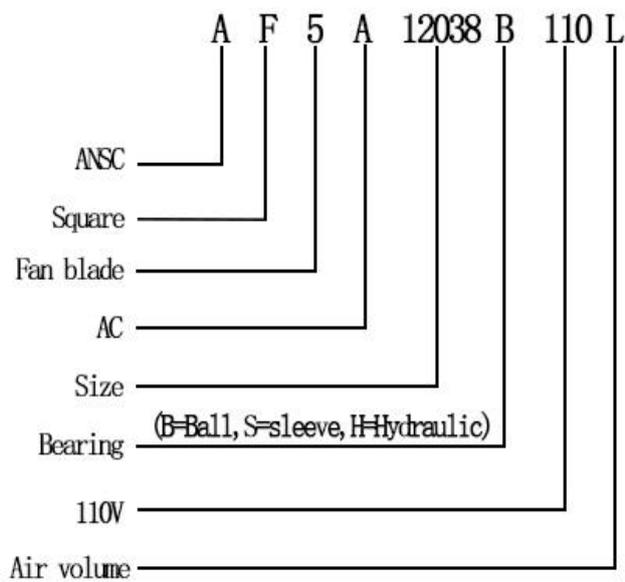

*PROPRIETARY AND CONFIDENTIAL , THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF <ALL NEW SEMI>.

ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF <ALL NEW SEMI> IS PROHIBITED.

<https://allnewsemi.com>
<https://allnewsemi.shop>