




# DC Centrifugal FAN

**AQL25099B 250\*99MM**


Motor:DC Centrifugal  
 Bearing:Ball  
 Shell frame: Aluminum  
 Fan blade: PBT UL94V\_0  
 Insulation:Class B  
 Wire:AWG#26UL1007 (optional)  
 PIN1:BLACK WIRE---(-)  
 PIN2:RED WIRE---(+)



**DIMENSIONS DRAWING(unit:mm)**

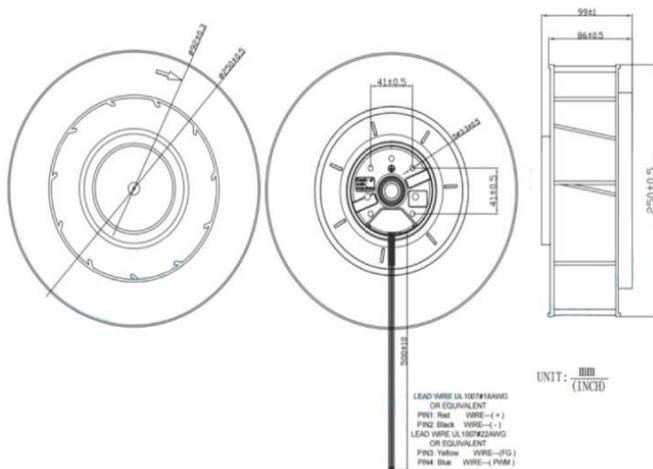

**P@Q CURVE(AT RATEDVOLTAGE)**

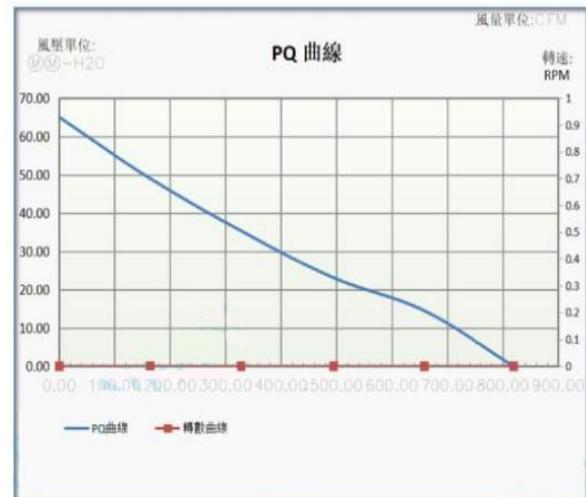

Model	Bearing Mode①	Rated Vol	Freque ncy	Rated current	Rated input power	Speed	Maximum air Flow		Maximum Air pressure		Noise
		VDC	VDC	Amp	Watt		R. P. M	M3/min	CFM	mmH2O	
PART. NO.		VDC	VDC	Amp	Watt	R. P. M	M3/min	CFM	mmH2O	InH2O	dB-A
AQL25099B24L	B=Ball S=Sleeve H=Hydraulic	24	18~26.5	5.00	120.00	2000	960	565.3	40.60	397.80	61
AQL25099B24M		24	18~26.5	7.10	170.40	2500	1349	794.5	54.50	534.60	70
AQL25099B24H		24	18~26.5	8.20	196.80	2950	1391	819.2	65.10	638.60	79
AQL25099B48L		48	36~54	2.50	120.00	2000	960	565.3	40.60	397.80	61
AQL25099B48M		48	36~54	3.55	170.40	2500	1349	794.5	54.50	534.60	70
AQL25099B48H		48	36~54	4.10	196.80	2950	1391	819.2	65.10	638.60	79


① Bearing Mode: Ball / Sleeve / Hydraulic / Ball (UL) / Sleeve (UL) Hydraulic (UL)

② X=Function: FG RD RDL LD PWM TP VC RC CS RP SS AS CL IPX5

③ A=Plug

④ C=Customized by customers: Air volume, Air duct, Movement, Service life, Temperature, Noise, Material, Mold. etc.

导引: 编码规则 Code Rule

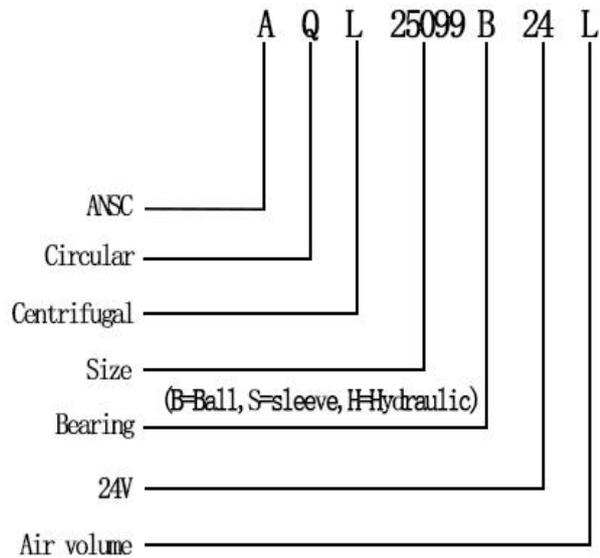

\*PROPRIETARY AND CONFIDENTIAL , THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF <ALL NEW SEMI>.  
ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF <ALL NEW SEMI> IS PROHIBITED.

<https://allnewsemi.com>  
<https://allnewsemi.shop>