




DC BRUSHLESS FAN

AF7D12738B 127*127*38mm


Motor:DC Brushless
 Bearing:Ball、Sleeve
 Shell frame: PBT UL94V-0
 Fan blade: PBT UL94V-0
 Insulation:Class B
 Wire:AWG#26UL1007 (optional)
 PIN1:BLACK WIRE---(-)
 PIN2:RED WIRE---(+)



DIMENSIONS DRAWING(unit:mm)

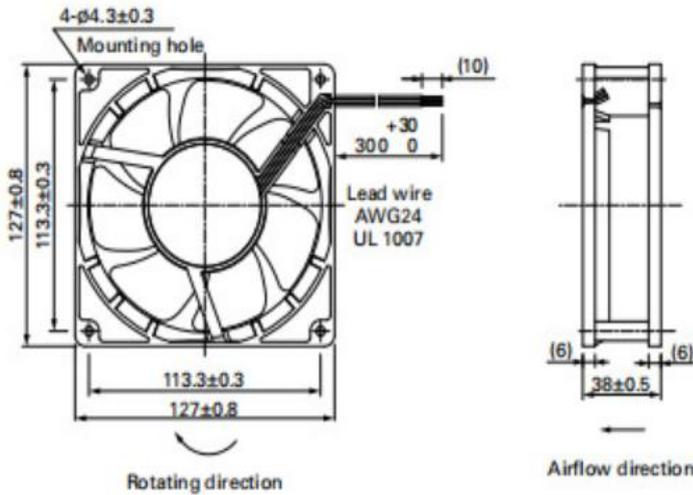

P@Q CURVE(AT RATEDVOLTAGE)

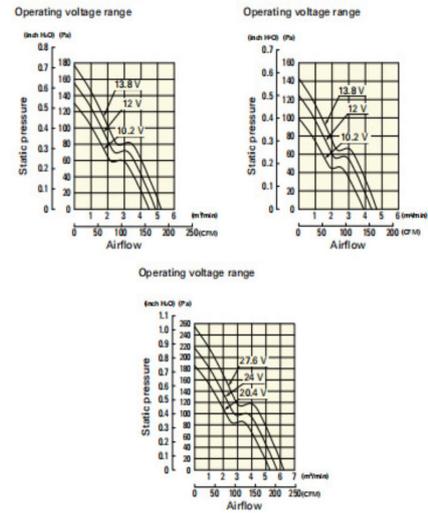

Model	Bearing Mode①	Rated	Operating	Rated	Rated	Speed	Maximum		Maximum		Noise
		Volt	voltage range	current	input power		air Flow	Air pressure	PA	InH2O	
PART. NO.		VDC	VDC	Amp	Watt	R. P. M	M3/min	CFM	PA	InH2O	dB-A
AF7D12738B12L	B=Ball S=Sleeve H=Hydraulic	12	10.2~13.8	1.2	14.4	3450	4.37	154	125	0.502	49
AF7D12738B12M		12	10.2~13.8	1.4	16.8	3850	4.81	170	155	0.622	52
AF7D12738B24L		24	20.4~27.6	0.53	12.7	3450	4.37	154	125	0.502	49
AF7D12738B24M		24	20.4~27.6	0.7	16.8	3850	4.81	170	155	0.622	52
AF7D12738B24H		24	20.4~27.6	1.1	26.4	4550	5.66	200	216	0.867	57
AF7D12738B48L		48	40.8~55.2	0.28	13.4	3450	4.37	154	125	0.502	49

AF7D12738B48M	B=Ball	48	40.8~55.2	0.36	17.3	3850	4.81	170	155	0.622	52
AF7D12738B48H	S=Sleeve H=Hydraulic	48	40.8~55.2	0.54	25.9	4550	5.66	200	216	0.867	57


①Bearing Mode:Ball/ Sleeve/Hydraulic/Ball (UL)/Sleeve (UL)Hydraulic (UL)

②X=Function: FG RD RDL LD PWM TP VC RC CS RP SS AS CL IPX5

③A=Plug

④C=Customized by customers: Air volume, Air duct, Movement,Service life, Temperature, Noise, Material, Mold.etc.

导引： 编码规则Code Rule

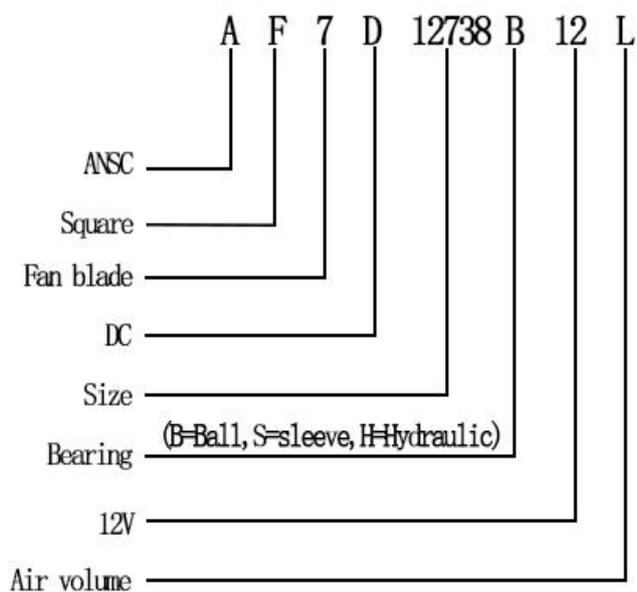

*PROPRIETARY AND CONFIDENTIAL , THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF <ALL NEW SEMI>.
ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF <ALL NEW SEMI> IS PROHIBITED.

<https://allnewsemi.com>
<https://allnewsemi.shop>