




## AC BRUSHLESS FAN

AF7A9238B 92\*92\*38mm


Motor: AC Brushless  
 Bearing: Ball  
 Shell frame: Aluminium Alloy  
 Fan blade: PBT UL94V-0  
 Insulation: Class B  
 Wire: AWG#26UL1007 (optional)  
 PIN1: BLACK WIRE---(-)  
 PIN2: RED WIRE---(+)



DIMENSIONS DRAWING(unit:mm)

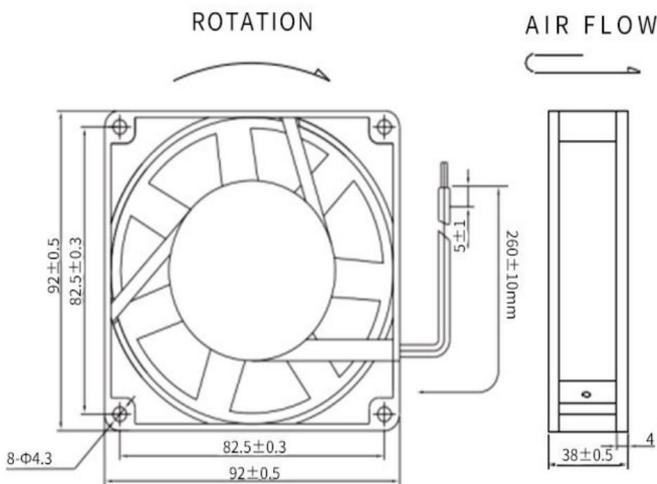

P@Q CURVE(AT RATED VOLTAGE)

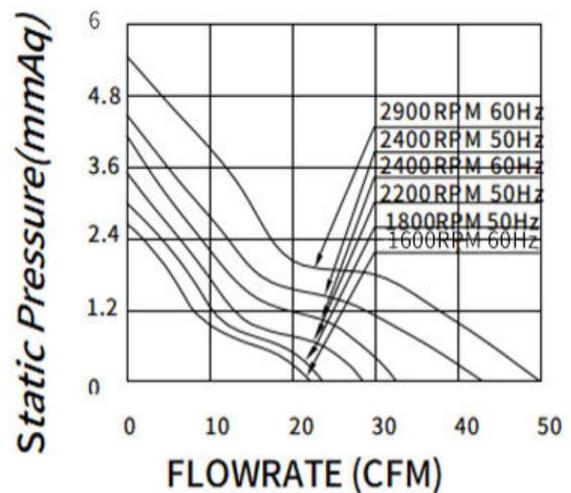

Model	Bearing Mode①	Rated Vol	Operating voltage	Rated current	Rated input power	Speed	Maximum air Flow		Maximum Air pressure		Noise
		VAC	VAC	Amp	Watt		M3/min	CFM	mmH2O	InH2O	
PART. NO.		VAC	VAC	Amp	Watt	R. P. M	M3/min	CFM	mmH2O	InH2O	dB-A
AF7A9238B110H	B=Ball S=Sleeve H=Hydraulic	110	100~125	0.16/0.1	16/14	2400/2900	1.21/1.4	43/50	4.5/5.5	0.17/0.2	32/36
AF7A9238B110M		110	100~125	0.13/0.1	14/12	2200/2400	0.79/0.9	28/32	3.5/4.2	0.13/0.1	27/31
AF7A9238B110L		110	100~125	0.1/0.0	10/9	1800/1600	0.67/0.6	24/23	3/2.7	0.11/0.1	20/18
AF7A9238B220H		220	220~240	0.16/0.1	16/14	2400/2900	1.21/1.4	43/50	4.5/5.5	0.17/0.2	32/36
AF7A9238B220M		220	220~240	0.13/0.1	14/12	2200/2400	0.79/0.9	28/32	3.5/4.2	0.13/0.1	27/31
AF7A9238B220L		220	220~240	0.1/0.0	10/9	1800/1600	0.67/0.6	24/23	3/2.7	0.11/0.1	20/18


① Bearing Mode: Ball / Sleeve / Hydraulic / Ball (UL) / Sleeve (UL) / Hydraulic (UL)

② X=Function: FG RD RDL LD PWM TP VC RC CS RP SS AS CL IPX5

③ A=Plug

④ C=Customized by customers: Air volume, Air duct, Movement, Service life, Temperature, Noise, Material, Mold. etc.

导引：编码规则 Code Rule

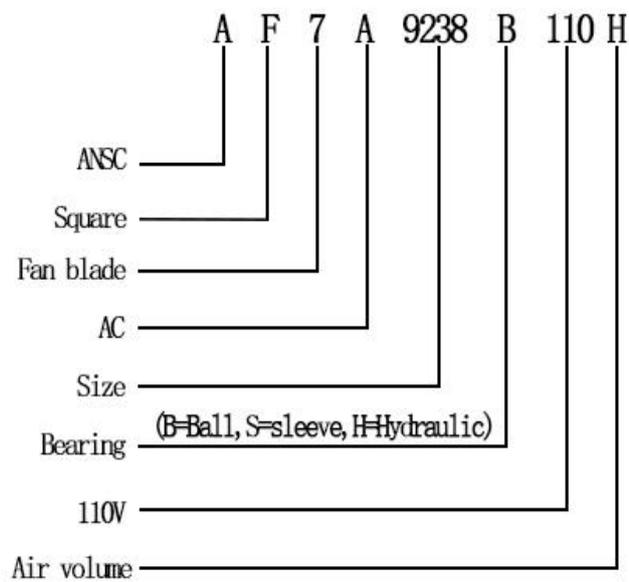

\*PROPRIETARY AND CONFIDENTIAL , THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF <ALL NEW SEMI>.

ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF <ALL NEW SEMI> IS PROHIBITED.

<https://allnewsemi.com>  
<https://allnewsemi.shop>